
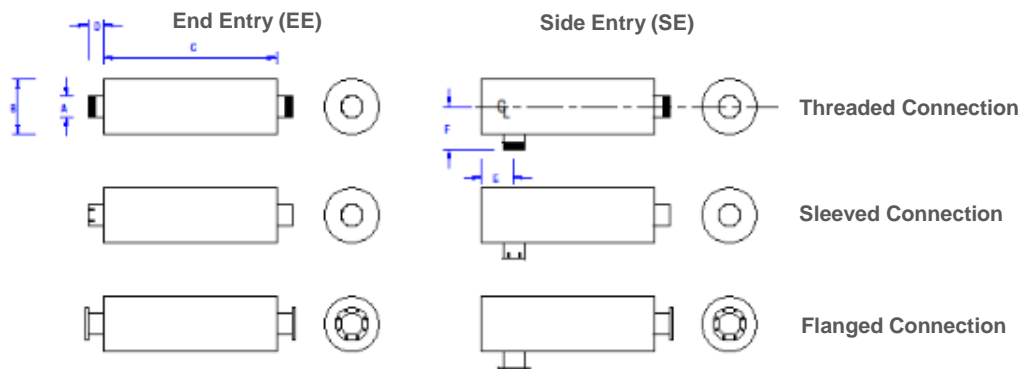


SIROCO Industrial Grade Silencers

- Entry level silencer
- Minimum flow resistance
- Absorptive silencing
- End and side entry available
- Threaded, sleeved and flanged connections
- Manufactured in the UK

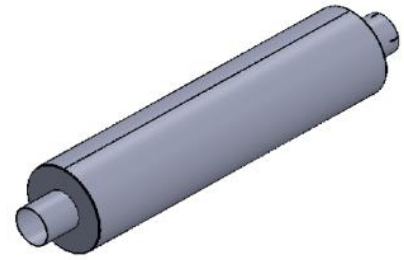

Nominal Bore - A		Diameter - B		Length - C		D	E	F	Approx. Weight	Capacity m ³ min	Part No.	
mm	inch	mm	inch	mm	inch	mm	mm	mm	kg	m ³	End Entry	Side Entry
25	1	89	3½	381	15	38	38	50	2.5	0.5-0.8	GS-IND025EE	GS-IND025SE
32	1¼	89	3½	381	15	38	38	50	3	0.8-1.3	GS-IND032EE	GS-IND032SE
38	1½	121	4¾	610	24	38	50	50	5	1.3-1.8	GS-IND038EE	GS-IND038SE
50	2	133	5¼	762	30	50	50	50	7	1.8-3.3	GS-IND050EE	GS-IND050SE
64	2½	152	6	762	30	50	63	75	10	3.3-5.0	GS-IND064EE	GS-IND064SE
76	3	178	7	762	30	50	63	75	12	5.0-7.5	GS-IND076EE	GS-IND076SE
89	3½	178	7	914	36	50	75	140	17	7.5-10	GS-IND089EE	GS-IND089SE
100	4	229	9	914	36	50	80	165	22	10-13	GS-IND100EE	GS-IND100SE
125	5	305	12	914	36	50	83	203	34	13-20	GS-IND125EE	GS-IND125SE
150	6	356	14	1219	48	76	102	254	61	20-30	GS-IND150EE	GS-IND150SE
200	8	406	16	1524	60	76	127	279	70	30-55	GS-IND200EE	GS-IND200SE
250	10	457	18	1829	72	76	203	305	140	55-80	GS-IND250EE	GS-IND250SE
300	12	610	24	2438	96	102	250	406	230	80-120	GS-IND300EE	GS-IND300SE
350	14	610	24	2438	96	102	250	406	240	120-160	GS-IND350EE	GS-IND350SE
400	16	762	30	2743	108	102	250	483	350	160-215	GS-IND400EE	GS-IND400SE
450	18	762	30	2743	108	102	280	483	370	215-270	GS-IND450EE	GS-IND450SE
500	20	762	30	3000	118	102	305	483	505	270-340	GS-IND500EE	GS-IND500SE
550	22	762	30	3200	126	102	330	483	550	340-400	GS-IND550EE	GS-IND550SE
600	24	810	32	3658	144	102	355	507	820	400-480	GS-IND600EE	GS-IND600SE

SIROCO Industrial Grade Silencers

